


V-SH

This range of mounts comprises:

- A spring with high elasticity and very low natural frequency.
- An incorporated levelling system.
- A non-slip rubber base.
- A spare Sylomer to isolate mid and high frequencies comes standard.

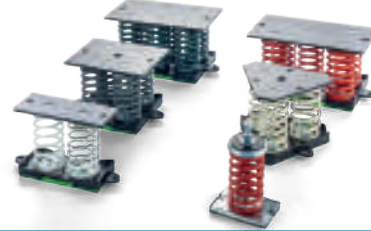

V-SH - Natural Frequency 3 to 5 Hz

| Type | Spring color | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | Load (kg) | Weight (kg) | Code | K (N/mm) |
|-----------------|--------------|--------|--------|--------|--------|--------|--------|-----------|-------------|--------------|----------|
| V-SH 67 | BLUE | 93 | 173 | M12 | 98,5 | 120 | 12 | 67 | 1,48 | 20397 | 13 |
| V-SH 95 | WHITE | 93 | 173 | M12 | 98,5 | 120 | 12 | 95 | 1,53 | 20465 | 19 |
| V-SH 123 | BLACK | 93 | 173 | M12 | 98,5 | 120 | 12 | 123 | 1,56 | 20398 | 25 |
| V-SH 173 | BEIGE | 93 | 173 | M12 | 98,5 | 120 | 12 | 173 | 1,65 | 20466 | 35 |
| V-SH 223 | RED | 93 | 173 | M12 | 98,5 | 120 | 12 | 223 | 2,11 | 20399 | 43 |
| V-SH 335 | GREY | 93 | 173 | M12 | 98,5 | 120 | 12 | 335 | 2,32 | 20467 | 68 |
| V-SH 446 | GREEN | 93 | 173 | M12 | 98,5 | 120 | 12 | 446 | 2,52 | 20400 | 88 |
| V-SH 700 | BROWN | 93 | 173 | M12 | 98,5 | 120 | 12 | 700 | 2,52 | 20464 | 150 |
| V-SH 67 NO-KIT | BLUE | 93 | 173 | M12 | 98,5 | 120 | 12 | 67 | 1,616 | 21001 | 13 |
| V-SH 95 NO-KIT | WHITE | 93 | 173 | M12 | 98,5 | 120 | 12 | 95 | 1,668 | 21002 | 19 |
| V-SH 123 NO-KIT | BLACK | 93 | 173 | M12 | 98,5 | 120 | 12 | 123 | 1,694 | 21003 | 25 |
| V-SH 173 NO-KIT | BEIGE | 93 | 173 | M12 | 98,5 | 120 | 12 | 173 | 1,786 | 21004 | 35 |
| V-SH 223 NO-KIT | RED | 93 | 173 | M12 | 98,5 | 120 | 12 | 273 | 2,154 | 21005 | 43 |
| V-SH 335 NO-KIT | GREY | 93 | 173 | M12 | 98,5 | 120 | 12 | 335 | 2,327 | 21006 | 68 |
| V-SH 446 NO-KIT | GREEN | 93 | 173 | M12 | 98,5 | 120 | 12 | 446 | 2,628 | 21007 | 88 |
| V-SH 700 NO-KIT | BROWN | 93 | 173 | M12 | 98,5 | 120 | 12 | 700 | 2,728 | 20462 | 150 |
| V-SH-67-DB | BLUE | 140 | 182 | 12 | 98,5 | 120 | - | 67 | 1,48 | 20512 | 13 |
| V-SH-95-DB | WHITE | 140 | 182 | 12 | 98,5 | 120 | - | 95 | 1,48 | 20513 | 19 |
| V-SH-123-DB | BLACK | 140 | 182 | 12 | 98,5 | 120 | - | 123 | 1,48 | 20514 | 25 |
| V-SH-173-DB | BEIGE | 140 | 182 | 12 | 98,5 | 120 | - | 173 | 1,48 | 20515 | 35 |
| V-SH-223-DB | RED | 140 | 182 | 12 | 98,5 | 120 | - | 223 | 1,48 | 20516 | 43 |
| V-SH-335-DB | GREY | 140 | 182 | 12 | 98,5 | 120 | - | 335 | 1,48 | 20517 | 68 |
| V-SH-446-DB | GREEN | 140 | 182 | 12 | 98,5 | 120 | - | 446 | 1,48 | 20518 | 88 |
| V-SH-700-DB | BROWN | 140 | 182 | 12 | 98,5 | 120 | - | 700 | 2,72 | 20530 | 150 |

| Type | Spring color | A (mm) | B (mm) | D (mm) | E (mm) | F (mm) | G (mm) | H (mm) | I (mm) | J (mm) | Load (kg) | Weight (kg) | Code | K (N/mm) |
|------------|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-----------|-------------|--------------|----------|
| 2V-SH 134 | BLUE | 250 | 180 | 100 | 14 | 210 | 100 | 106 | 270 | 298 | 134 | 4,85 | 20405 | 27 |
| 2V-SH 190 | WHITE | 250 | 180 | 100 | 14 | 210 | 100 | 106 | 270 | 298 | 190 | 4,85 | 21010 | 37 |
| 2V-SH 246 | BLACK | 250 | 180 | 100 | 14 | 210 | 100 | 106 | 270 | 298 | 226 | 5,25 | 20406 | 50 |
| 2V-SH 346 | BEIGE | 250 | 180 | 100 | 14 | 210 | 100 | 106 | 270 | 298 | 346 | 4,85 | 21011 | 69 |
| 2V-SH 446 | RED | 250 | 180 | 100 | 14 | 210 | 100 | 106 | 270 | 298 | 446 | 5,85 | 20407 | 86 |
| 2V-SH 670 | GREY | 250 | 180 | 100 | 14 | 210 | 100 | 106 | 270 | 298 | 670 | 4,85 | 21012 | 137 |
| 2V-SH 892 | GREEN | 250 | 180 | 100 | 14 | 210 | 100 | 106 | 270 | 298 | 892 | 6,91 | 20408 | 176 |
| 2V-SH 1400 | BROWN | 250 | 180 | 100 | 14 | 210 | 100 | 106 | 270 | 298 | 1400 | 7,3 | 21015 | 301 |

| Type | Spring color | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | G (mm) | H (mm) | I (mm) | Load (kg) | Weight (kg) | Code | K (N/mm) |
|------------|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-----------|-------------|--------------|----------|
| 3V-SH 201 | BLUE | 219 | 180 | M20 | 14 | 246 | 136 | 251 | 220 | 255,7 | 201 | 4,85 | 21020 | 40 |
| 3V-SH 285 | WHITE | 219 | 180 | M20 | 14 | 246 | 136 | 251 | 220 | 255,7 | 285 | 4,85 | 21021 | 56 |
| 3V-SH 369 | BLACK | 219 | 180 | M20 | 14 | 246 | 136 | 251 | 220 | 255,7 | 369 | 5,25 | 21022 | 75 |
| 3V-SH 519 | BEIGE | 219 | 180 | M20 | 14 | 246 | 136 | 251 | 220 | 255,7 | 519 | 4,85 | 21023 | 104 |
| 3V-SH 669 | RED | 219 | 180 | M20 | 14 | 246 | 136 | 251 | 220 | 255,7 | 669 | 5,85 | 21024 | 129 |
| 3V-SH 1005 | GREY | 219 | 180 | M20 | 14 | 246 | 136 | 251 | 220 | 255,7 | 1005 | 4,85 | 21025 | 205 |
| 3V-SH 1338 | GREEN | 219 | 180 | M20 | 14 | 246 | 136 | 251 | 220 | 255,7 | 1338 | 6,91 | 21026 | 263 |
| 3V-SH 2100 | BROWN | 219 | 180 | M20 | 14 | 246 | 136 | 251 | 220 | 255,7 | 2100 | 11 | 21029 | 451 |

V-SH - Natural Frequency 3 to 5 Hz

| Type | Spring color | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | G (mm) | H (mm) | I (mm) | Load (kg) | Code | Weight (kg) | K (N/mm) |
|------------|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-----------|--------------|-------------|----------|
| 4V-SH 268 | BLUE | 250 | 180 | M20 | 200 | 14 | 210 | 260 | 288 | 206 | 268 | 21030 | 11,15 | 54 |
| 4V-SH 380 | WHITE | 250 | 180 | M20 | 200 | 14 | 210 | 260 | 288 | 206 | 380 | 21031 | 11,95 | 74 |
| 4V-SH 492 | BLACK | 250 | 180 | M20 | 200 | 14 | 210 | 260 | 288 | 206 | 492 | 21032 | 12,2 | 100 |
| 4V-SH 692 | BEIGE | 250 | 180 | M20 | 200 | 14 | 210 | 260 | 288 | 206 | 692 | 21033 | 12,49 | 138 |
| 4V-SH 892 | RED | 250 | 180 | M20 | 200 | 14 | 210 | 260 | 288 | 206 | 892 | 21034 | 12,72 | 172 |
| 4V-SH 1340 | GREY | 250 | 180 | M20 | 200 | 14 | 210 | 260 | 288 | 206 | 1340 | 21035 | 13,14 | 274 |
| 4V-SH 1784 | GREEN | 250 | 180 | M20 | 200 | 14 | 210 | 260 | 288 | 206 | 1784 | 21036 | 13,727 | 351 |
| 4V-SH 2800 | BROWN | 250 | 180 | M20 | 200 | 14 | 210 | 260 | 288 | 206 | 2800 | 21039 | 13,727 | 601 |

| Type | Spring color | A (mm) | B (mm) | D (mm) | E (mm) | F (mm) | G (mm) | H (mm) | I (mm) | Load (kg) | Code | Weight (kg) | K (N/mm) |
|------------|--------------|--------|--------|--------|--------|--------|--------|--------|--------|-----------|--------------|-------------|----------|
| 5V-SH 335 | BLUE | 350 | 180 | 200 | 18 | 315 | 360 | 396 | 206 | 335 | 21040 | 13,071 | 67 |
| 5V-SH 475 | WHITE | 350 | 180 | 200 | 18 | 315 | 360 | 396 | 206 | 475 | 21041 | 13,356 | 93 |
| 5V-SH 615 | BLACK | 350 | 180 | 200 | 18 | 315 | 360 | 396 | 206 | 615 | 21042 | 13,476 | 125 |
| 5V-SH 865 | BEIGE | 350 | 180 | 200 | 18 | 315 | 360 | 396 | 206 | 865 | 21043 | 13,926 | 173 |
| 5V-SH 1115 | RED | 350 | 180 | 200 | 18 | 315 | 360 | 396 | 206 | 1115 | 21044 | 15,781 | 215 |
| 5V-SH 1675 | GREY | 350 | 180 | 200 | 18 | 315 | 360 | 396 | 206 | 1675 | 21045 | 16,786 | 342 |
| 5V-SH 2230 | GREEN | 350 | 180 | 200 | 18 | 315 | 360 | 396 | 206 | 2230 | 21046 | 18,116 | 439 |
| 5V-SH 3500 | BROWN | 350 | 180 | 200 | 18 | 315 | 360 | 396 | 206 | 3500 | 21049 | 18,116 | 752 |

| Type | Spring color | A (mm) | B (mm) | D (mm) | E (mm) | F (mm) | G (mm) | H (mm) | I (mm) | Load (kg) | Code | Weight (kg) | K (N/mm) |
|------------|--------------|--------|--------|--------|--------|--------|--------|--------|--------|-----------|--------------|-------------|----------|
| 6V-SH 402 | BLUE | 350 | 180 | 200 | 18 | 300 | 360 | 396 | 206 | 402 | 21050 | 13,87 | 80 |
| 6V-SH 570 | WHITE | 350 | 180 | 200 | 18 | 300 | 360 | 396 | 206 | 570 | 21051 | 14,212 | 112 |
| 6V-SH 738 | BLACK | 350 | 180 | 200 | 18 | 300 | 360 | 396 | 206 | 738 | 21052 | 14,356 | 149 |
| 6V-SH 1038 | BEIGE | 350 | 180 | 200 | 18 | 300 | 360 | 396 | 206 | 1038 | 21053 | 14,896 | 208 |
| 6V-SH 1338 | RED | 350 | 180 | 200 | 18 | 300 | 360 | 396 | 206 | 1338 | 21054 | 17,122 | 258 |
| 6V-SH 2010 | GREY | 350 | 180 | 200 | 18 | 300 | 360 | 396 | 206 | 2010 | 21055 | 18,328 | 410 |
| 6V-SH 2676 | GREEN | 350 | 180 | 200 | 18 | 300 | 360 | 396 | 206 | 2676 | 21056 | 19,924 | 527 |
| 6V-SH 4200 | BROWN | 350 | 180 | 200 | 18 | 300 | 360 | 396 | 206 | 4200 | 21059 | 19,924 | 902 |


| Type | Spring color | A (mm) | B (mm) | D (mm) | E (mm) | F (mm) | G (mm) | H (mm) | I (mm) | J (mm) | Load (kg) | Code | Weight (kg) | K N/mm |
|------------|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-----------|--------------|-------------|--------|
| 9V-SH 603 | BLUE | 350 | 180 | 300 | 18 | 310 | 360 | 396 | 306 | 100 | 603 | 21060 | 21,176 | 121 |
| 9V-SH 855 | WHITE | 350 | 180 | 300 | 18 | 310 | 360 | 396 | 306 | 100 | 855 | 21061 | 21,689 | 167 |
| 9V-SH 1107 | BLACK | 350 | 180 | 300 | 18 | 310 | 360 | 396 | 306 | 100 | 1107 | 21062 | 21,905 | 224 |
| 9V-SH 1557 | BEIGE | 350 | 180 | 300 | 18 | 310 | 360 | 396 | 306 | 100 | 1557 | 21063 | 22,715 | 311 |
| 9V-SH 2007 | RED | 350 | 180 | 300 | 18 | 310 | 360 | 396 | 306 | 100 | 2007 | 21064 | 26,054 | 387 |
| 9V-SH 3015 | GREY | 350 | 180 | 300 | 18 | 310 | 360 | 396 | 306 | 100 | 3015 | 21065 | 27,863 | 616 |
| 9V-SH 4014 | GREEN | 350 | 180 | 300 | 18 | 310 | 360 | 396 | 306 | 100 | 4014 | 21066 | 30,257 | 790 |
| 9V-SH 6300 | BROWN | 350 | 180 | 300 | 18 | 310 | 360 | 396 | 306 | 100 | 6300 | 21069 | 30,257 | 1353 |

V-SH ELASTICAL PROPERTIES


FASCALEX
3755 Place Java, Local 160
Brossard, Qc.
J4Y 0E4

Contrôle
Bruits
Vibrations
Vibrations
Noises
Control


LOAD VS DEFLECTION DIAGRAM
AMC-MECANOCAUCHO® 1V-SH

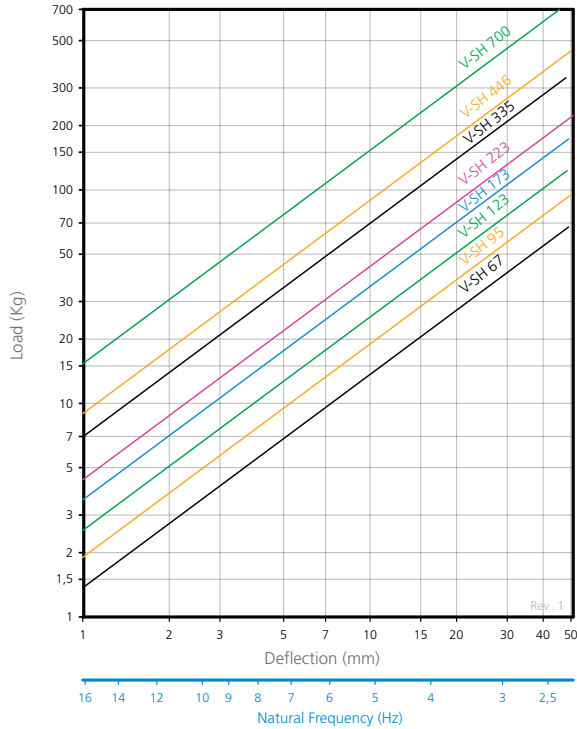


LOAD VS DEFLECTION DIAGRAM
AMC-MECANOCAUCHO® 2V-SH

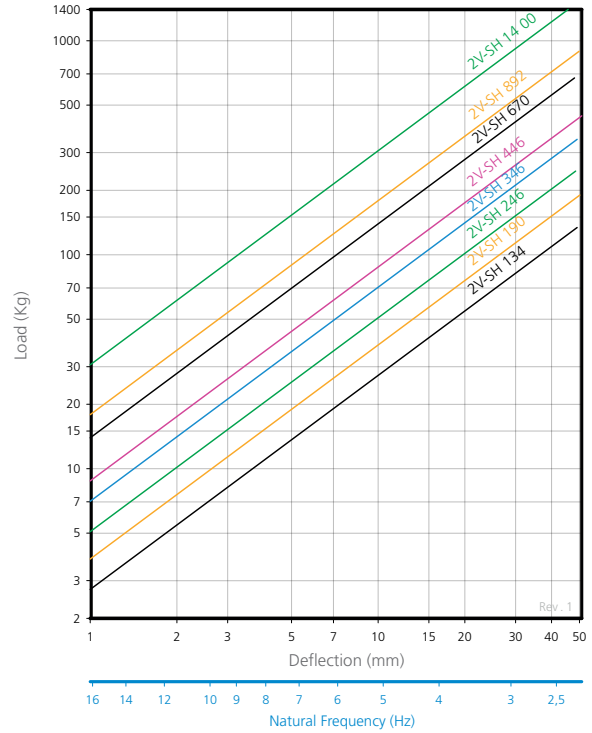

LOAD VS DEFLECTION DIAGRAM
AMC-MECANOCAUCHO® 3V-SH

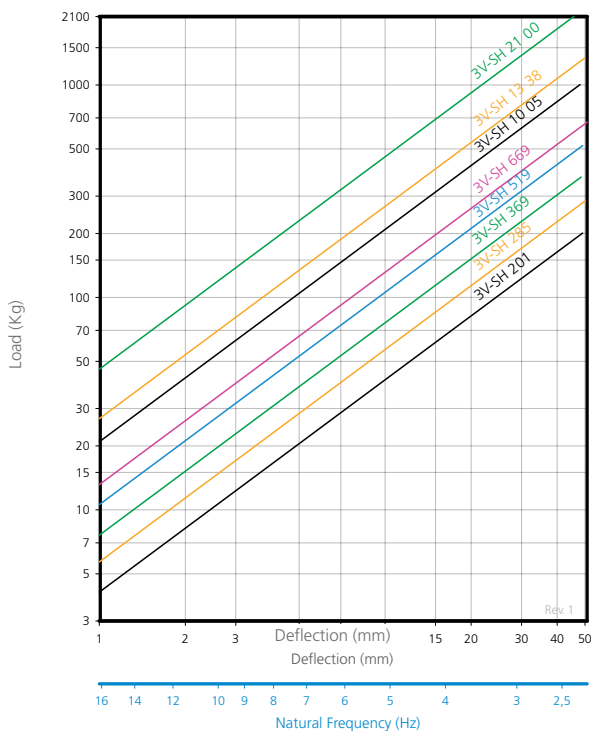


LOAD VS DEFLECTION DIAGRAM
AMC-MECANOCAUCHO® 4V-SH

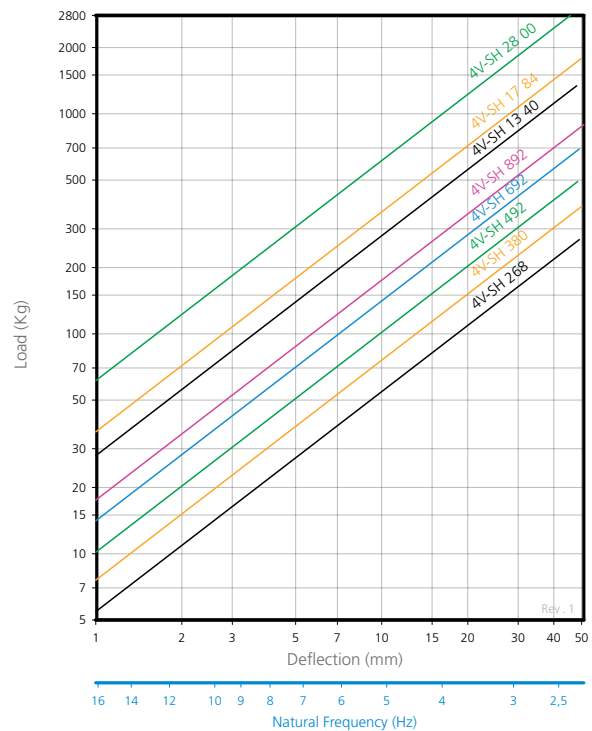


V-SH ELASTICAL PROPERTIES


LOAD VS DEFLECTION DIAGRAM
AMC-MECANOCAUCHO® 5V-SH

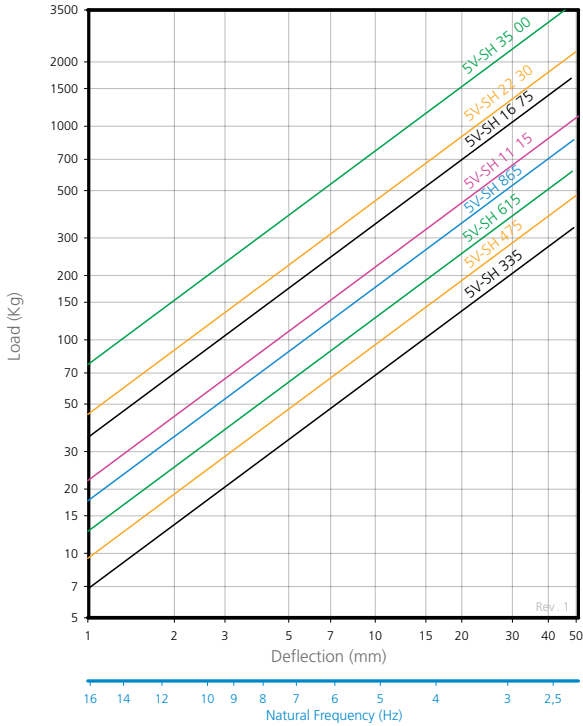

LOAD VS DEFLECTION DIAGRAM
AMC-MECANOCAUCHO® 6V-SH

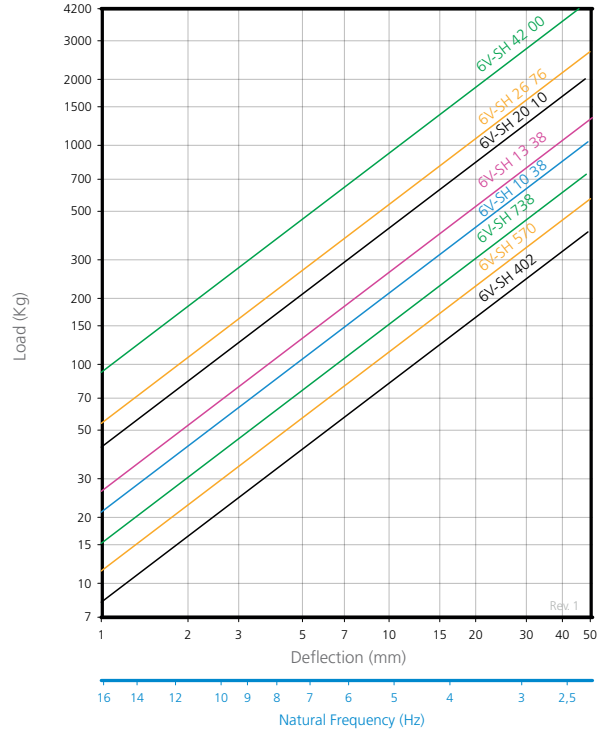

LOAD VS DEFLECTION DIAGRAM
AMC-MECANOCAUCHO® 9V-SH

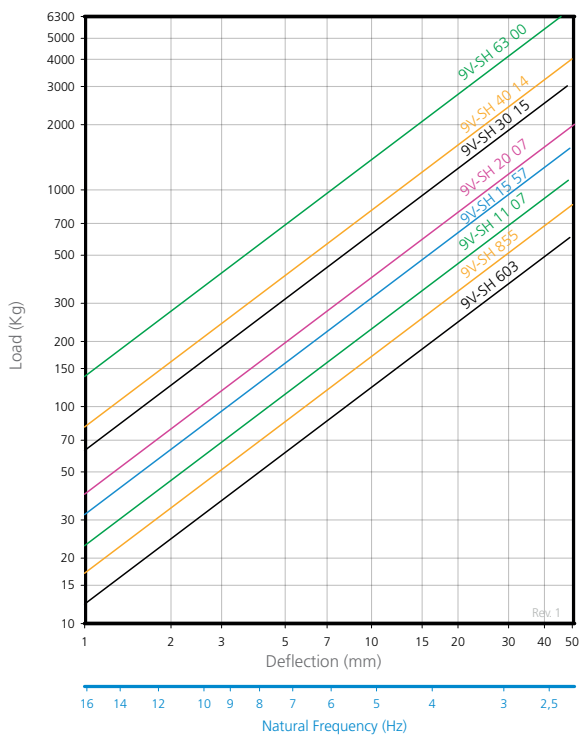



V-SR

The mounts are able to reach low natural frequencies from 4 to 5 Hz. The spring combined with Sylomer® is able to provide high isolation at low and medium frequencies.

The curves are showing the deflection and natural frequencies according to the load of the spring

Temperature working range from 30 to 70°. Short term higher temperatures are possible.

V-SR - Natural Frequency 4 to 5 Hz




| Type | Spring color | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | Load (kg) | Weight (kg) | Code | K (N/mm) |
|------------------|--------------|--------|--------|--------|--------|--------|--------|-----------|-------------|--------------|----------|
| V-SR-200 | BLACK | 93 | 173 | M10 | 98,5 | 120 | 12 | 200 | 1,48 | 21320 | 64 |
| V-SR-400 | BLACK | 93 | 173 | M10 | 98,5 | 120 | 12 | 400 | 1,77 | 21321 | 134 |
| V-SR-650 | BLACK | 93 | 173 | M12 | 98,5 | 120 | 12 | 650 | 2,57 | 20393 | 181 |
| V-SR-800 | BLACK | 93 | 173 | M12 | 98,5 | 120 | 12 | 800 | 2,6 | 20394 | 267 |
| V-SR-1000 | BLACK | 93 | 173 | M12 | 98,5 | 120 | 12 | 1000 | 3 | 20395 | 351 |
| V-SR-1200 | BLACK | 93 | 173 | M12 | 98,5 | 120 | 12 | 1200 | 3,2 | 20396 | 503 |
| V-SR 200 NO-KIT | BLACK | 93 | 173 | M12 | 98,5 | 120 | 12 | 200 | 1,343 | 21211 | 64 |
| V-SR 400 NO-KIT | BLACK | 93 | 173 | M12 | 98,5 | 120 | 12 | 400 | 1,545 | 21212 | 134 |
| V-SR 650 NO-KIT | BLACK | 93 | 173 | M12 | 98,5 | 120 | 12 | 650 | 2,57 | 21213 | 181 |
| V-SR 800 NO-KIT | BLACK | 93 | 173 | M12 | 98,5 | 120 | 12 | 800 | 2,69 | 21214 | 267 |
| V-SR 1000 NO-KIT | BLACK | 93 | 173 | M12 | 98,5 | 120 | 12 | 1000 | 2,94 | 21215 | 351 |
| V-SR 1200 NO-KIT | BLACK | 93 | 173 | M12 | 98,5 | 120 | 12 | 1200 | 3 | 21216 | 503 |
| V-SR-200-DB | BLACK | 140 | 182 | 12 | 98,5 | 120 | - | 200 | 1,55 | 20557 | 64 |
| V-SR-400-DB | BLACK | 140 | 182 | 12 | 98,5 | 120 | - | 400 | 0 | 20558 | 134 |
| V-SR-650-DB | BLACK | 140 | 182 | 12 | 98,5 | 120 | - | 650 | 2,3 | 20403 | 181 |
| V-SR-800-DB | BLACK | 140 | 182 | 12 | 98,5 | 120 | - | 800 | 2,6 | 20458 | 267 |
| V-SR-1000-DB | BLACK | 140 | 182 | 12 | 98,5 | 120 | - | 1000 | 3 | 20662 | 351 |
| V-SR-1200-DB | BLACK | 140 | 182 | 12 | 98,5 | 120 | - | 1200 | 3,11 | 20559 | 503 |


| Type | Spring color | A (mm) | B (mm) | D (mm) | E (mm) | F (mm) | G (mm) | H (mm) | I (mm) | J (mm) | Load (kg) | Weight (kg) | Code | K (N/mm) |
|------------|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-----------|-------------|--------------|----------|
| 2V-SR-400 | BLACK | 250 | 180 | 100 | 14 | 210 | 100 | 106 | 270 | 298 | 400 | 4,8 | 21322 | 128 |
| 2V-SR-800 | BLACK | 250 | 180 | 100 | 14 | 210 | 100 | 106 | 270 | 298 | 800 | 5,31 | 21323 | 267 |
| 2V-SR-1300 | BLACK | 250 | 180 | 100 | 14 | 210 | 100 | 106 | 270 | 298 | 1300 | 7,32 | 21071 | 362 |
| 2V-SR-1600 | BLACK | 250 | 180 | 100 | 14 | 210 | 100 | 106 | 270 | 298 | 1600 | 7,46 | 21072 | 575 |
| 2V-SR-2000 | BLACK | 250 | 180 | 100 | 14 | 210 | 100 | 106 | 270 | 298 | 2000 | 7,78 | 21073 | 702 |
| 2V-SR-2400 | BLACK | 250 | 180 | 100 | 14 | 210 | 100 | 106 | 270 | 298 | 2400 | 7,98 | 21074 | 1007 |

| Type | Spring color | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | G (mm) | H (mm) | I (mm) | Load (kg) | Weight (kg) | Code | K (N/mm) |
|------------|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-----------|-------------|--------------|----------|
| 3V-SR-600 | BLACK | 219 | 180 | M20 | 14 | 246 | 136 | 251 | 220 | 255,7 | 600 | - | 21324 | 192 |
| 3V-SR-1200 | BLACK | 219 | 180 | M20 | 14 | 246 | 136 | 251 | 220 | 255,7 | 1200 | 8,5 | 21325 | 401 |
| 3V-SR-1950 | BLACK | 219 | 180 | M20 | 14 | 246 | 136 | 251 | 220 | 255,7 | 1950 | 7,35 | 21131 | 543 |
| 3V-SR-2400 | BLACK | 219 | 180 | M20 | 14 | 246 | 136 | 251 | 220 | 255,7 | 2400 | 7,56 | 21132 | 862 |
| 3V-SR-3000 | BLACK | 219 | 180 | M20 | 14 | 246 | 136 | 251 | 220 | 255,7 | 3000 | 7,77 | 21133 | 1053 |
| 3V-SR-3600 | BLACK | 219 | 180 | M20 | 14 | 246 | 136 | 251 | 220 | 255,7 | 3600 | 7,81 | 21134 | 1510 |


V-SR - Natural Frequency 4 to 5 Hz

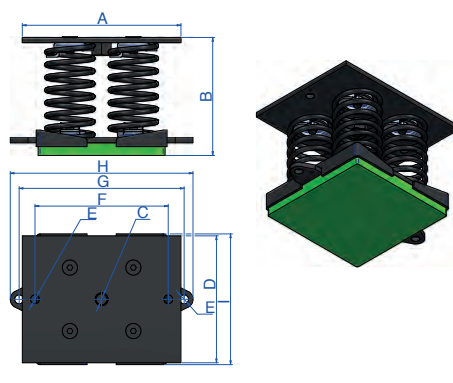


| Type | Spring color | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | G (mm) | H (mm) | I (mm) | J (mm) | Load (kg) | Weight (kg) | Code | K (N/mm) |
|------------|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-----------|-------------|-------|----------|
| 4V-SR-800 | BLACK | 250 | 180 | M20 | 200 | 14 | 210 | 260 | 288 | 206 | | 800 | 0 | 21326 | 256 |
| 4V-SR-1600 | BLACK | 250 | 180 | M20 | 200 | 14 | 210 | 260 | 288 | 206 | | 1600 | 0 | 21327 | 535 |
| 4V-SR-2600 | BLACK | 250 | 180 | M20 | 200 | 14 | 210 | 260 | 288 | 206 | | 2600 | 13,12 | 21081 | 724 |
| 4V-SR-3200 | BLACK | 250 | 180 | M20 | 200 | 14 | 210 | 260 | 288 | 206 | | 3200 | 13,46 | 21082 | 1149 |
| 4V-SR-4000 | BLACK | 250 | 180 | M20 | 200 | 14 | 210 | 260 | 288 | 206 | | 4000 | 13,78 | 21083 | 1404 |
| 4V-SR-4800 | BLACK | 250 | 180 | M20 | 200 | 14 | 210 | 260 | 288 | 206 | | 4800 | 13,88 | 21084 | 2013 |

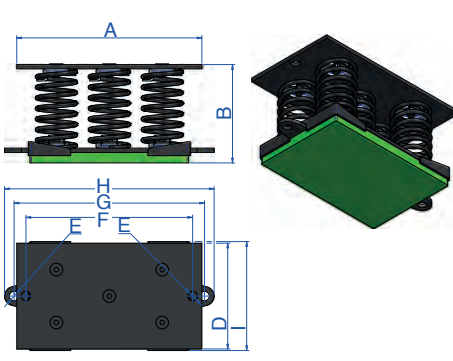

| Type | Spring color | A (mm) | B (mm) | D (mm) | E (mm) | F (mm) | G (mm) | H (mm) | I (mm) | Load (kg) | Code | Weight (kg) | K (N/mm) |
|------------|--------------|--------|--------|--------|--------|--------|--------|--------|--------|-----------|-------|-------------|----------|
| 5V-SR-1000 | BLACK | 350 | 180 | 200 | 18 | 315 | 360 | 396 | 206 | 1000 | 21328 | 0 | 320 |
| 5V-SR-2000 | BLACK | 350 | 180 | 200 | 18 | 315 | 360 | 396 | 206 | 2000 | 21329 | 0 | 668 |
| 5V-SR-3250 | BLACK | 350 | 180 | 200 | 18 | 315 | 360 | 396 | 206 | 3250 | 21091 | 17,97 | 905 |
| 5V-SR-4000 | BLACK | 350 | 180 | 200 | 18 | 315 | 360 | 396 | 206 | 4000 | 21092 | 18,095 | 1437 |
| 5V-SR-5000 | BLACK | 350 | 180 | 200 | 18 | 315 | 360 | 396 | 206 | 5000 | 21093 | 19,62 | 1756 |
| 5V-SR-6000 | BLACK | 350 | 180 | 200 | 18 | 315 | 360 | 396 | 206 | 6000 | 21094 | 19,99 | 2516 |


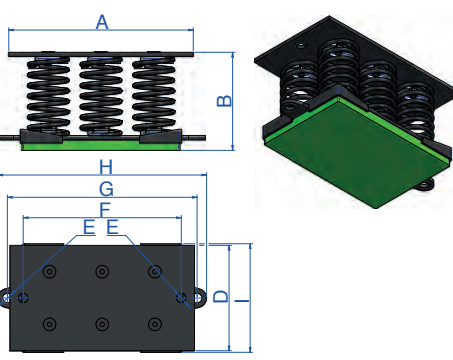


| Type | Spring color | A (mm) | B (mm) | D (mm) | E (mm) | F (mm) | G (mm) | H (mm) | I (mm) | Load (kg) | Weight (kg) | Code | K (N/mm) |
|------------|--------------|--------|--------|--------|--------|--------|--------|--------|--------|-----------|-------------|-------|----------|
| 6V-SR-1200 | BLACK | 350 | 180 | 200 | 18 | 300 | 360 | 396 | 206 | 1200 | 0 | 21330 | 384 |
| 6V-SR-2400 | BLACK | 350 | 180 | 200 | 18 | 300 | 360 | 396 | 206 | 2400 | 0 | 21331 | 802 |
| 6V-SR-3900 | BLACK | 350 | 180 | 200 | 18 | 300 | 360 | 396 | 206 | 3900 | 19,75 | 21101 | 1086 |
| 6V-SR-4800 | BLACK | 350 | 180 | 200 | 18 | 300 | 360 | 396 | 206 | 4800 | 19,9 | 21102 | 1724 |
| 6V-SR-6000 | BLACK | 350 | 180 | 200 | 18 | 300 | 360 | 396 | 206 | 6000 | 21,73 | 21103 | 2107 |
| 6V-SR-7200 | BLACK | 350 | 180 | 200 | 18 | 300 | 360 | 396 | 206 | 7200 | 22,174 | 21104 | 3020 |

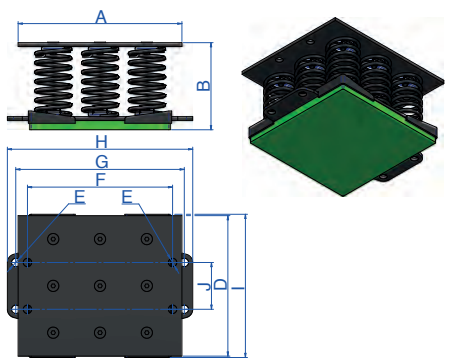


| Type | Spring color | A (mm) | B (mm) | D (mm) | E (mm) | F (mm) | G (mm) | H (mm) | I (mm) | J (mm) | Load (kg) | Weight (kg) | Code | K (N/mm) |
|-------------|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-----------|-------------|-------|----------|
| 9V-SR-1800 | BLACK | 350 | 180 | 300 | 18 | 310 | 360 | 396 | 306 | 100 | 1800 | 0 | 21332 | 576 |
| 9V-SR-3600 | BLACK | 350 | 180 | 300 | 18 | 310 | 360 | 396 | 306 | 100 | 3600 | 19,75 | 21333 | 1203 |
| 9V-SR-5850 | BLACK | 350 | 180 | 300 | 18 | 310 | 360 | 396 | 306 | 100 | 5850 | 19,75 | 21111 | 1629 |
| 9V-SR-7200 | BLACK | 350 | 180 | 300 | 18 | 310 | 360 | 396 | 306 | 100 | 7200 | 19,9 | 21112 | 2587 |
| 9V-SR-9000 | BLACK | 350 | 180 | 300 | 18 | 310 | 360 | 396 | 306 | 100 | 9000 | 21,73 | 21113 | 3160 |
| 9V-SR-10800 | BLACK | 350 | 180 | 300 | 18 | 310 | 360 | 396 | 306 | 100 | 10800 | 22,174 | 21114 | 4530 |


V-SR ELASTICAL PROPERTIES




LOAD VS DEFLECTION DIAGRAM
AMC-MECANOCAUCHO® 1V-SR

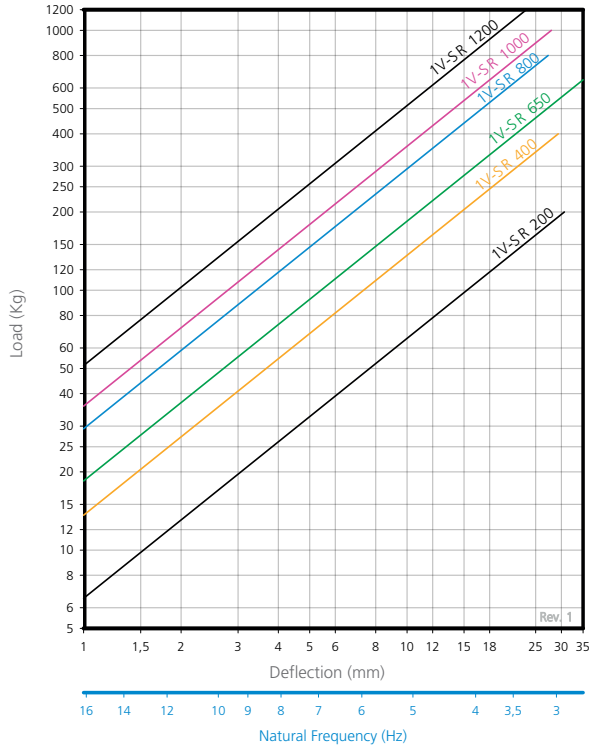


LOAD VS DEFLECTION DIAGRAM
AMC-MECANOCAUCHO® 2V-SR

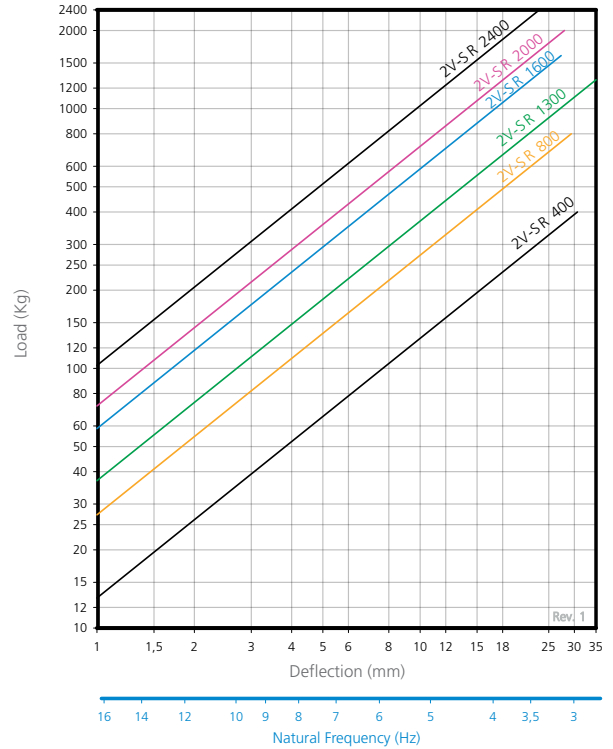

LOAD VS DEFLECTION DIAGRAM
AMC-MECANOCAUCHO® 3V-SR

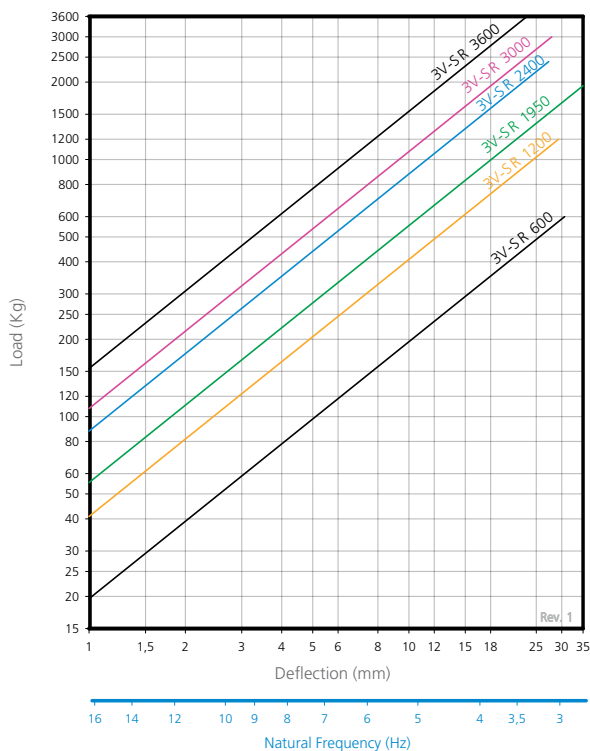


LOAD VS DEFLECTION DIAGRAM
AMC-MECANOCAUCHO® 4V-SR

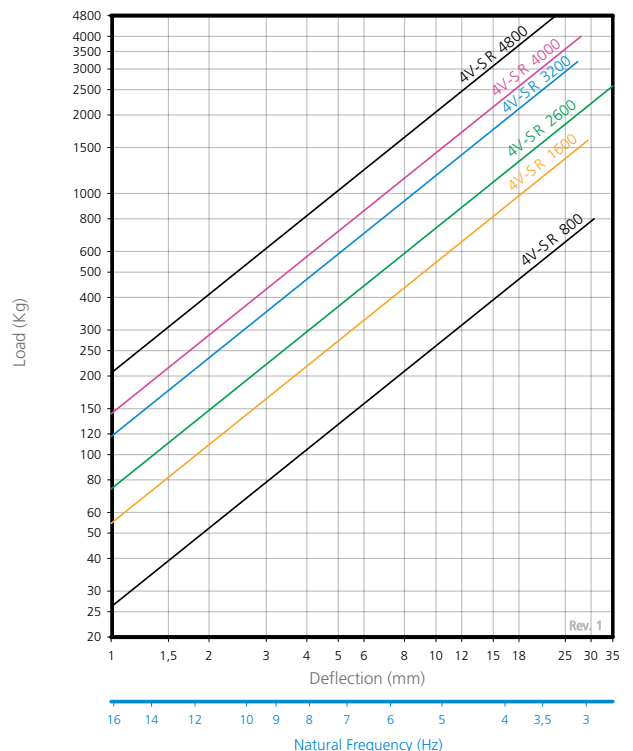


V-SR ELASTICAL PROPERTIES

LOAD VS DEFLECTION DIAGRAM
AMC-MECANOCAUCHO® 5V-SR

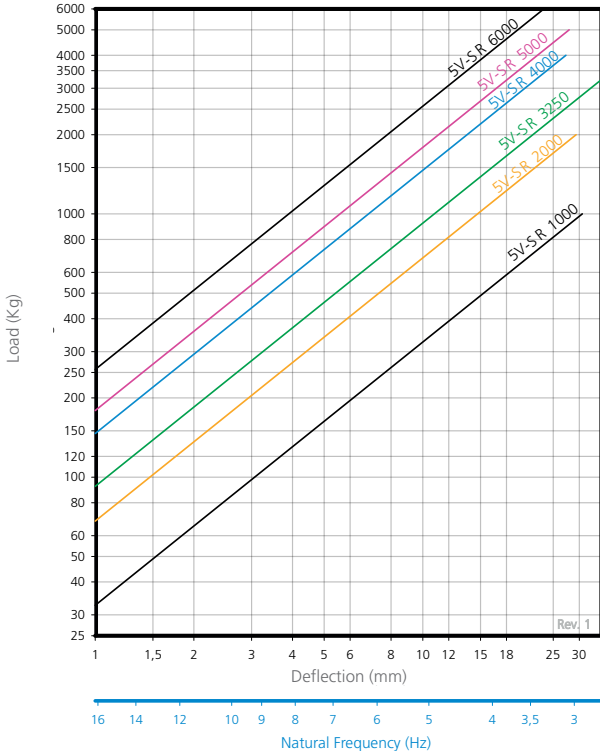

LOAD VS DEFLECTION DIAGRAM
AMC-MECANOCAUCHO® 6V-SR

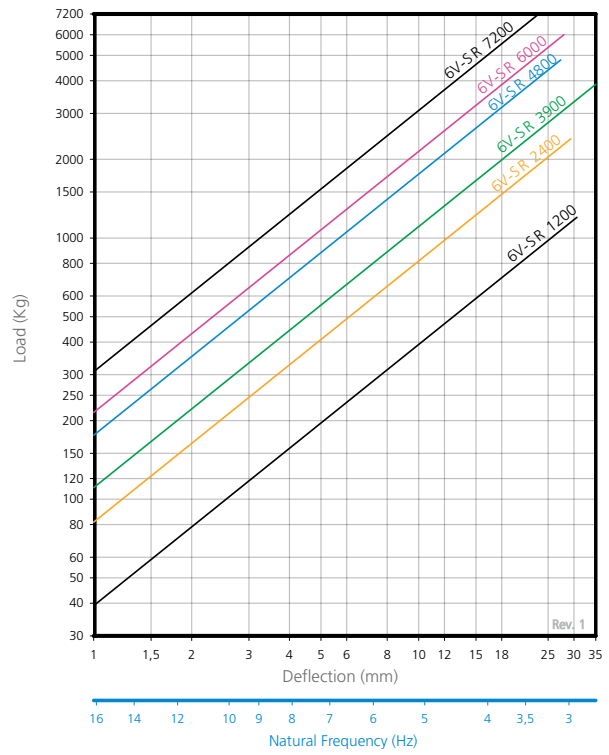

LOAD VS DEFLECTION DIAGRAM
AMC-MECANOCAUCHO® 9V-SR

